

11251 Outdoor LED Up/Down Wall Sconce



Description:

11251 Outdoor LED Up/Down Wall Sconce features a cylinder with up and down light used to highlight architectural surfaces. Made of cast aluminum with powder coat finish in Textured Architectural Bronze or Textured Black finish and polycarbonate top shield. Includes one 5 watt LED uplight and one 10 watt LED downlight totaling 15 watts with Pure White 3000K, 905CRI color temperature and LED driver. 40,000 hour average lamp life. 4.5 inch width x 12.25 inch height x 6.5 inch depth. UL listed. Title 24 Compliant. Suitable for wet locations.

Shown in: Textured Architectural Bronze

List Price: \$217.50
 Our Price: \$174.00

Shade Color: N/A
 Body Finish: Textured Architectural Bronze
 Lamp: 1 x LED/15W/120V LED
 Wattage: 15W
 Dimmer: Not Dimmable
 Dimensions: 5"W x 12"H x 6.5"D

Technical Information

Lamp Color: 3000 K
 Color Rendering: 85 CRI

Product Number: KHR349589			
Company:		Fixture Type:	Date: Oct 16, 2018
Project:		Approved By:	

Fax: (773) 883-6131

Phone: 866-954-4489

Address: 1718 W. Fullerton Ave. Chicago IL 60614

www.Lightology.com

Cree Edge™ Series

LED Pathway Luminaire

Product Description

Durable die-cast aluminum luminaire housing mounts directly to 4" (102mm) diameter pole (included) without visible mounting hardware for clean appearance. Pole mounts to rugged die cast aluminum internal flange secured by three 3/8" - 16x6" anchor bolts with 1-1/4" hook (provided). **Note:** T45 Torx 3/8" socket required for head installation. Top mounted LEDs for superior optical performance and light control.

Applications: Landscape, walk-ways and general site lighting

Performance Summary

Patented NanoOptic® Product Technology

Made in the U.S.A. of U.S. and imported parts

CRI: Minimum 70 CRI


CCT: 4000K (+/- 300K), 5700K (+/- 500K) standard

Limited Warranty*: 10 years on luminaire/10 years on Colorfast DeltaGuard® finish

* See <http://lighting.cree.com/warranty> for warranty terms

Accessories

Field-Installed
Upgrade Kit - Used for replacement of existing bollards with a bolt hole circle of 5.75" (146mm) XA-XBP8RSV XA-XBP8RWH XA-XBP8RBK XA-XBP8RBZ

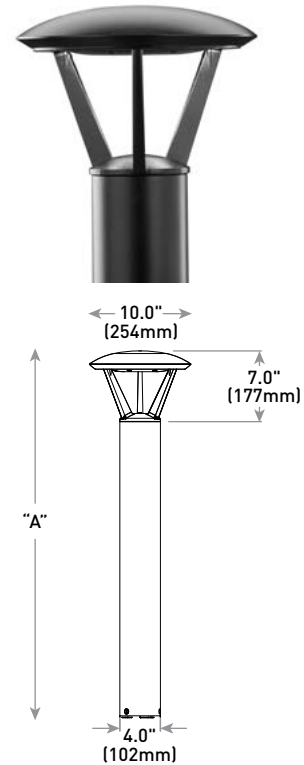

Model	Dim. "A"	Weight*
Landscape (P0)	13" (330mm)	12.7 lbs. (5.8kg)
Landscape (P1)	18" (457mm)	13.3 lbs. (6.0kg)
Pathway (P3)	36" (914mm)	17.9 lbs. (8.1kg)
Pathway (P4)	42" (1068mm)	18.6 lbs. (8.4kg)
Pedestrian (P8)	96" (2438mm)	28.4 lbs (12.9kg)

* Add 4.5 lbs. (2.0kg) for 347-480V

Ordering Information

Example: PWY-EDG-2M-P0-02-E-UL-SV-350

PWY-EDG			02	E				
Product	Optic	Mounting	LED Count (x9)	Series	Voltage	Color Options	Drive Current	Options
PWY-EDG	2M Type II Medium 3M Type III Medium 5M Type V Medium 5S Type V Short	P0 13" (330mm) landscape P1 18" (457mm) landscape P3 36" (914mm) pathway P4 42" (1067mm) pathway P8 96" (2438mm) pedestrian	02	E	UL Universal 120-277V UH* Universal 347-480V - Available with P3, P4, and P8 mounts only 12 120V 27 277V	BK Black BZ Bronze SV Silver WH White	350 350mA 525 525mA - Available with P1, P3, P4, and P8 mounts only	F Fuse - When code dictates fusing, use time delay fuse - Refer to ML spec sheet for availability with ML options HL Hi/Low (Dual Circuit Input) - Available with UL voltage and 525mA driver current only - Refer to HL spec sheet for details - Sensor not included TL Two-Level (175/525 w/integrated sensor control) - Available with 12 or 27 voltages only - Refer to TL spec sheet for details TL2 Two-Level (0/350 w/integrated sensor control) - Available with 12 or 27 voltages only - Refer to TL spec sheet for details TL3 Two-Level (0/525 w/integrated sensor control) - Available with 12 or 27 voltages only - Refer to TL spec sheet for details WB Welded Base Plate - Standard on P8 mount option, available with P3 and P4 mount - Includes welded base cover 40K 4000K Color Temperature - Minimum 70 CRI - Color temperature per luminaire

* 347-480V utilizes magnetic step-down transformer. For input power for 347-480V, refer to the Electrical Data table



US: lighting.cree.com

T (800) 236-6800 F (262) 504-5415

Rev. Date: V5 10/16/2018

Canada: www.cree.com/canada



T (800) 473-1234 F (800) 890-7507

Product Specifications

CONSTRUCTION & MATERIALS

- Durable die-cast aluminum luminaire housing mounts directly to 4" (102mm) diameter pole (included) without visible mounting hardware for clean appearance
- Pole mounts to rugged die cast aluminum internal flange secured by three 3/8"-16x6" anchor bolts with 1-1/4" hook (provided).
Note: T45 Torx 3/8" socket required for head installation
- Top mounted LEDs for superior optical performance and light control
- Exclusive Colorfast DeltaGuard® finish features an E-Coat epoxy primer with an ultradurable powder topcoat, providing excellent resistance to corrosion, ultraviolet degradation and abrasion. Black, bronze, silver and white are available
- **Weight:** See Dimension and Weight Chart on pages 1 and 4

ELECTRICAL SYSTEM

- **Input Voltage:** 120-277V or 347-480V, 50/60Hz, Class 1 drivers
- **Power Factor:** > 0.9 at full load at 120V
- **Total Harmonic Distortion:** < 20% at full load at 120V
- Integral 10kV surge suppression protection standard
- When code dictates fusing, a slow blow fuse or type C/D breaker should be used to address inrush current

REGULATORY & VOLUNTARY QUALIFICATIONS

- cULus Listed
- Suitable for wet locations
- 10kV surge suppression protection tested in accordance with IEEE/ANSI C62.41.2
- Luminaire and finish endurance tested to withstand 5,000 hours of elevated ambient salt fog conditions as defined in ASTM Standard B 117
- Meets Buy American requirements within ARRA
- RoHS compliant. Consult factory for additional details
- **CA RESIDENTS WARNING:** Cancer and Reproductive Harm – www.p65warnings.ca.gov

Electrical Data* (A)								
LED Count (x9)	System Watts 120-277V	System Watts 347-480V	Total Current					
			120V	208V	240V	277V	347V	480V
350mA								
02	22	28	0.18	0.12	0.10	0.10	0.09	0.13
525mA								
02	34	40	0.29	0.19	0.17	0.15	0.12	0.13

* Electrical data at 25°C (77°F). Actual wattage may differ by +/- 10% when operating between 120-480V +/- 10%

Recommended Cree Edge™ Series Lumen Maintenance Factors (LMF) ¹					
Ambient	Initial LMF	25K hr Projected ² LMF	50K hr Projected ² LMF	75K hr Calculated ³ LMF	100K hr Calculated ³ LMF
5°C (41°F)	1.04	0.99	0.97	0.95	0.93
10°C (50°F)	1.03	0.98	0.96	0.94	0.92
15°C (59°F)	1.02	0.97	0.95	0.93	0.91
20°C (68°F)	1.01	0.96	0.94	0.92	0.90
25°C (77°F)	1.00	0.95	0.93	0.91	0.89

¹ Lumen maintenance values at 25°C are calculated per TM-21 based on LM-80 data and in-situ luminaire testing


² In accordance with IESNA TM-21-11, Projected Values represent interpolated value based on time durations that are within six times (6X) the IESNA LM-80-08 total test duration (in hours) for the device under testing ((DUT) i.e. the packaged LED chip)

³ In accordance with IESNA TM-21-11, Calculated Values represent time durations that exceed six times (6X) the IESNA LM-80-08 total test duration (in hours) for the device under testing ((DUT) i.e. the packaged LED chip)


Photometry

All published luminaire photometric testing performed to IESNA LM-79-08 standards by a NVLAP accredited laboratory. To obtain an IES file specific to your project consult: <http://lighting.cree.com/products/outdoor/bollards-and-pathway/cree-edge-pathway>

2M



RESTL Test Report #: PL5758-001
 PWY-EDG-2M-**-02-E-UL-350-40K
 Initial Delivered Lumens: 1,549




PWY-EDG-2M-**-02-E-UL-350-40K
 Mounting Height: 3' [0.9m] A.F.G.
 Initial Delivered Lumens: 1,565
 Initial FC at grade


Type II Medium Distribution				
LED Count (x9)	4000K		5700K	
	Initial Delivered Lumens*	BUG Ratings** Per TM-15-11	Initial Delivered Lumens*	BUG Ratings** Per TM-15-11
350mA				
02	1,565	B1 U0 G1	1,625	B1 U0 G1
525mA				
02	2,191	B1 U0 G1	2,276	B1 U0 G1

* Initial delivered lumens at 25°C (77°F). Actual production yield may vary between -10 and +10% of initial delivered lumens
 ** For more information on the IES BUG (Backlight-Uplight-Glare) Rating visit: www.ies.org/PDF/Erratas/TM-15-11BugRatingsAddendum.pdf

3M



RESTL Test Report #: PL5698-001
 PWY-EDG-3M-**-02-E-UL-350-40K
 Initial Delivered Lumens: 1,470




PWY-EDG-3M-**-02-E-UL-350-40K
 Mounting Height: 3' [0.9m] A.F.G.
 Initial Delivered Lumens: 1,389
 Initial FC at grade


Type III Medium Distribution				
LED Count (x9)	4000K		5700K	
	Initial Delivered Lumens*	BUG Ratings** Per TM-15-11	Initial Delivered Lumens*	BUG Ratings** Per TM-15-11
350mA				
02	1,389	B1 U0 G1	1,442	B1 U0 G1
525mA				
02	1,944	B1 U0 G1	2,019	B1 U0 G1

* Initial delivered lumens at 25°C (77°F). Actual production yield may vary between -10 and +10% of initial delivered lumens
 ** For more information on the IES BUG (Backlight-Uplight-Glare) Rating visit: www.ies.org/PDF/Erratas/TM-15-11BugRatingsAddendum.pdf

5M



RESTL Test Report #: PL5798-001
 PWY-EDG-5M-**-02-E-UL-350-40K
 Initial Delivered Lumens: 1,780



PWY-EDG-5M-**-02-E-UL-350-40K
 Mounting Height: 3' [0.9m] A.F.G.
 Initial Delivered Lumens: 1,666
 Initial FC at grade

Type V Medium Distribution				
LED Count (x9)	4000K		5700K	
	Initial Delivered Lumens*	BUG Ratings** Per TM-15-11	Initial Delivered Lumens*	BUG Ratings** Per TM-15-11
350mA				
02	1,666	B1 U2 G1	1,730	B1 U2 G1
525mA				
02	2,333	B2 U2 G2	2,422	B2 U2 G2


* Initial delivered lumens at 25°C (77°F). Actual production yield may vary between -10 and +10% of initial delivered lumens
 ** For more information on the IES BUG (Backlight-Uplight-Glare) Rating visit: www.ies.org/PDF/Erratas/TM-15-11BugRatingsAddendum.pdf




Photometry

All published luminaire photometric testing performed to IESNA LM-79-08 standards by a NVLAP accredited laboratory. To obtain an IES file specific to your project consult: <http://lighting.cree.com/products/outdoor/bollards-and-pathway/cree-edge-pathway>

55

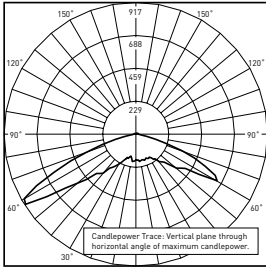

RESTL Test Report #: PL5759-001
 PWY-EDG-5S-**-02-E-UL-350-40K
 Initial Delivered Lumens: 1,897




PWY-EDG-5S-**-02-E-UL-350-40K
 Mounting Height: 3' [0.9m] A.F.G.
 Initial Delivered Lumens: 1,868
 Initial FC at grade

Type V Short Distribution				
LED Count (x9)	4000K		5700K	
	Initial Delivered Lumens*	BUG Ratings** Per TM-15-11	Initial Delivered Lumens*	BUG Ratings** Per TM-15-11
350mA				
02	1,868	B1 U2 G1	1,940	B1 U2 G1
525mA				
02	2,615	B1 U2 G1	2,716	B1 U2 G1

* Initial delivered lumens at 25°C (77°F). Actual production yield may vary between -10 and +10% of initial delivered lumens
 ** For more information on the IES BUG (Backlight-Uplight-Glare) Rating visit: www.ies.org/PDF/Erratas/TM-15-11BugRatingsAddendum.pdf

with Welded Base

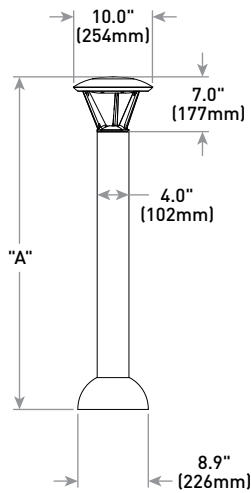

Model	Dim. "A"	Weight*
Pathway (P3)	36" [914mm]	17.9 lbs. [8.1kg]
Pathway (P4)	42" [1068mm]	18.6 lbs. [8.4kg]
Pedestrian (P8)	96" [2438mm]	28.4 lbs [12.9kg]

* Add 4.5 lbs. [2.0kg] for 347-480V

OSQ Series

OSQ™ LED Area/Flood Luminaire – Medium

Product Description

The OSQ™ Area/Flood luminaire blends extreme optical control, advanced thermal management and modern, clean aesthetics. Built to last, the housing is rugged cast aluminum with an integral, weathertight LED driver compartment. Versatile mounting configurations offer simple installation. Its slim, low-profile design minimizes wind load requirements and blends seamlessly into the site providing even, quality illumination. The 'B' Input power designator is a suitable upgrade for HID applications up to 250 Watt, and the 'K' Input power designator is a suitable upgrade for HID applications up to 400 Watt.

Applications: Parking lots, walkways, campuses, car dealerships, office complexes, and internal roadways

Performance Summary

NanoOptic® Precision Delivery Grid™ optic

Assembled in the U.S.A. of U.S. and imported parts

Initial Delivered Lumens: Up to 17,291

Efficacy: Up to 136 LPW

CRI: Minimum 70 CRI

CCT: 3000K (+/- 300K), 4000K (+/- 300K), 5700K (+/- 500K)

Limited Warranty*: 10 years on luminaire/10 years on Colorfast DeltaGuard® finish

* See <http://lighting.cree.com/warranty> for warranty terms

Accessories

Field-Installed	
Backlight Shield OSQ-BLSMF - Front facing optics OSQ-BLSMR - Rotated optics	Hand-Held Remote XA-SENSREM - For successful implementation of the programmable multi-level option, a minimum of one hand-held remote is required

Ordering Information

Fully assembled luminaire is composed of two components that must be ordered separately:
 Example: **Mount:** OSQ-AA SV + **Luminaire:** OSQ-A-NM-2ME-B-40K-UL-SV


Mount (Luminaire must be ordered separately)*	
OSQ-	
OSQ-AA Adjustable Arm OSQ-DA Direct Arm	Color Options: SV Silver BK Black BZ Bronze WH White

* Reference EPA and pole configuration suitability data beginning on page 7

Luminaire (Mount must be ordered separately)									
OSQ	A	NM							
Product	Version	Mounting	Optic	Input Power Designator	CCT	Voltage	Color Options	Options	
OSQ	A	NM No Mount	Asymmetric 2ME* 4ME* Type II Type IV Medium Medium 3ME* Type III Medium <hr/> Symmetric 5ME 25D Type V 25° Flood Medium 40D 5SH 40° Flood Type V Short 60D 60D 60° Flood WSN Wide Sign 15D 15° Flood	B 86W K 130W Z 53W	30K 3000K 40K 4000K 57K 5700K	UL Universal 120-277V UH Universal 347-480V - Available with B & K Input Power Designators only	BK Black BZ Bronze SV Silver WH White	DIM 0-10V Dimming - Control by others - Refer to Dimming spec sheet for details - Can't exceed wattage of specified input power designator F Fuse - When code dictates fusing, use time delay fuse - Available for U.S. applications only PML Programmable Multi-Level, up to 40' Mounting Height - Refer to PML spec sheet for details - Intended for downlight applications at 0° tilt PML2 Programmable Multi-Level, 10-30' Mounting Height - Refer to PML spec sheet for details - Intended for downlight applications at 0° tilt	Q9/Q6/Q5/Q4/Q3/Q2/Q1 Field Adjustable Output - Must select Q9, Q6, Q5, Q4, Q3, Q2, or Q1 - Offers full range adjustability - Refer to pages 9-10 for power and lumen values - Available with B & K Input Power Designators only R NEMA® Photocell Receptacle - Intended for downlight applications with maximum 45° tilt - 3-pin receptacle per ANSI C136.10 - Photocell and shorting cap by others RL Rotate Left - LED and optic are rotated to the left - Refer to RR/RL configuration diagram on page 2 for optic directionality RR Rotate Right - LED and optic are rotated to the right - Refer to RR/RL configuration diagram on page 2 for optic directionality

* Available with Backlight Shield when ordered with field-installed accessory (see table above)

DA Mount

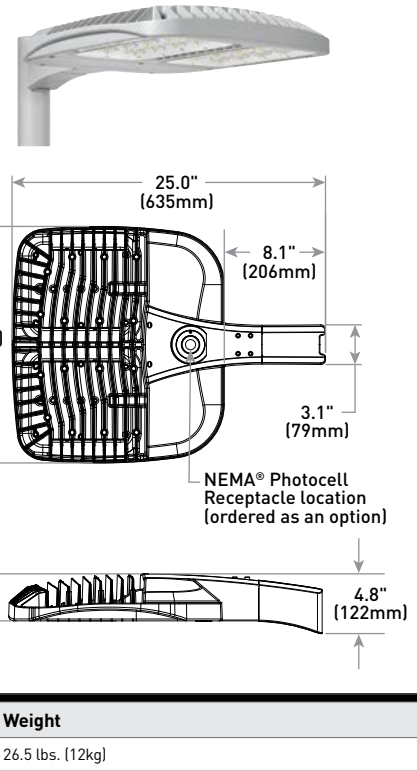

Rev. Date: V16 10/02/2018

US: lighting.cree.com

T (800) 236-6800 F (262) 504-5415

Canada: www.cree.com/canada



T (800) 473-1234 F (800) 890-7507

Product Specifications

CONSTRUCTION & MATERIALS

- Slim, low profile design minimizes wind load requirements
- Luminaire housing is rugged die cast aluminum with an integral, weathertight LED driver compartment and high performance heat sink
- Convenient interlocking mounting method on direct arm mount. Mounting adaptor is rugged die cast aluminum and mounts to 3-6" (76-152mm) square or round pole, secured by two 5/16-18 UNC bolts spaced on 2" (51mm) centers
- Mounting for the adjustable arm mount adaptor is rugged die cast aluminum and mounts to 2" (51mm) IP, 2.375" (60mm) O.D. tenon
- Adjustable arm mount can be adjusted 180° in 2.5° increments
- Designed for uplight and downlight applications
- Exclusive Colorfast DeltaGuard® finish features an E-Coat epoxy primer with an ultra-durable powder topcoat, providing excellent resistance to corrosion, ultraviolet degradation and abrasion. Silver, bronze, black, and white are available
- **Weight:** 26.5 lbs. (12kg)

ELECTRICAL SYSTEM

- **Input Voltage:** 120-277V or 347-480V, 50/60Hz, Class 1 drivers
- **Power Factor:** > 0.9 at full load
- **Total Harmonic Distortion:** < 20% at full load
- Integral 10kV surge suppression protection standard
- When code dictates fusing, a slow blow fuse or type C/D breaker should be used to address inrush current
- **10V Source Current:** 0.15mA

REGULATORY & VOLUNTARY QUALIFICATIONS

- cULus Listed
- Suitable for wet locations
- Enclosure rated IP66 per IEC 60529 when ordered without R option
- Consult factory for CE Certified products
- Certified to ANSI C136.31-2001, 3G bridge and overpass vibration standards
- 10kV surge suppression protection tested in accordance with IEEE/ANSI C62.41.2
- Meets FCC Part 15, Subpart B, Class A standards for conducted and radiated emissions
- Luminaire and finish endurance tested to withstand 5,000 hours of elevated ambient salt fog conditions as defined in ASTM Standard B 117
- Meets Buy American requirements within ARRA
- DLC and DLC Premium qualified versions available. Some exceptions apply. Please refer to <https://www.designlights.org/search/> for most current information
- RoHS compliant. Consult factory for additional details
- Dark Sky Friendly, IDA Approved when ordered with 30K CCT. Please refer to <http://darksky.org/fsa/fsa-products/> for most current information
- **CA RESIDENTS WARNING:** Cancer and Reproductive Harm – www.p65warnings.ca.gov


Electrical Data*							
Input Power Designator	System Watts 120-480V	Total Current (A)					
		120V	208V	240V	277V	347V	480V
B	86	0.73	0.43	0.37	0.32	0.25	0.19
K	130	1.09	0.65	0.56	0.49	0.38	0.28
Z	53**	0.46	0.26	0.22	0.19	N/A	N/A

* Electrical data at 25°C (77°F). Actual wattage may differ by +/- 10% when operating between 120-480V +/-10%
 ** Available with UL voltage only


OSQ Series Ambient Adjusted Lumen Maintenance ¹						
Ambient	Optic	Initial LMF	25K hr Projected ² LMF	50K hr Projected ² LMF	75K hr Projected ² / Calculated ³ LMF	100K hr Projected ² / Calculated ³ LMF
5°C (41°F)	Asymmetric	1.04	1.02	1.01	1.00 ³	0.99 ³
	Symmetric	1.05	1.04	1.03	1.03 ²	1.02 ²
10°C (50°F)	Asymmetric	1.03	1.01	1.00	0.99 ³	0.98 ³
	Symmetric	1.04	1.03	1.02	1.01 ²	1.00 ²
15°C (59°F)	Asymmetric	1.02	1.00	0.99	0.98 ³	0.97 ³
	Symmetric	1.02	1.02	1.01	1.00 ²	0.99 ²
20°C (68°F)	Asymmetric	1.01	0.99	0.98	0.97 ³	0.96 ³
	Symmetric	1.01	1.01	1.00	0.99 ²	0.98 ²
25°C (77°F)	Asymmetric	1.00	0.98	0.97	0.96 ³	0.95 ³
	Symmetric	1.00	0.99	0.98	0.98 ²	0.97 ²

¹ Lumen maintenance values at 25°C (77°F) are calculated per TM-21 based on LM-80 data and in-situ luminaire testing. Luminaire ambient temperature factors (LATF) have been applied to all lumen maintenance factors. Please refer to the [Temperature Zone Reference Document](#) for outdoor average nighttime ambient conditions.
² In accordance with IESNA TM-21-11, Projected Values represent interpolated value based on time durations that are within six times (6X) the IESNA LM-80-08 total test duration (in hours) for the device under testing (DUT) i.e. the packaged LED chip
³ In accordance with IESNA TM-21-11, Calculated Values represent time durations that exceed six times (6X) the IESNA LM-80-08 total test duration (in hours) for the device under testing (DUT) i.e. the packaged LED chip

AA Mount

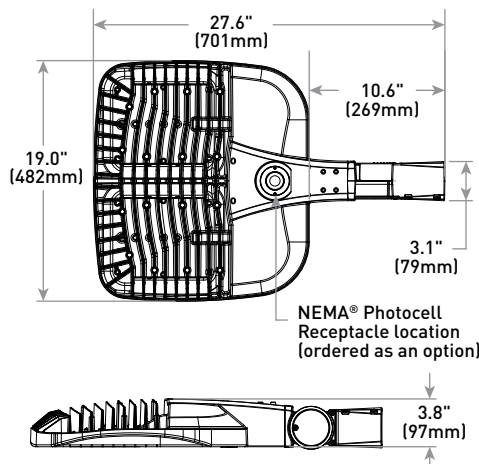


RR/RL Configuration

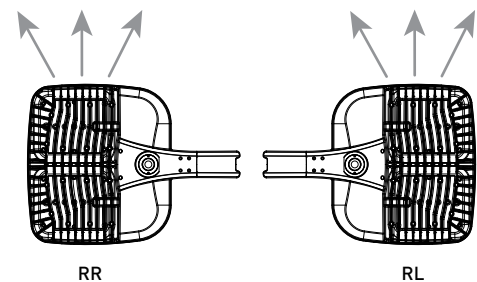


Photometry

All published luminaire photometric testing performed to IESNA LM-79-08 standards by a NVLAP accredited laboratory. To obtain an IES file specific to your project consult: <http://lighting.cree.com/products/outdoor/area/osq-series>


2ME




RESTL Test Report #: PL08877-001
OSQ-A-2ME-B-30K-UL**
Initial Delivered Lumens: 10,381



OSQ-A-2ME-B-40K-UL**
Mounting Height: 25' (7.6m) A.F.G.
Initial Delivered Lumens: 11,424
Initial FC at grade



CESTL Test Report #: PL07700-001A
OSQ-A-2ME-U-57K-UL w/OSQ-BLSLF**
Initial Delivered Lumens: 22,822



OSQ-A-2ME-B-40K-UL w/OSQ-BLSMF**
Mounting Height: 25' (7.6m) A.F.G.
Initial Delivered Lumens: 8,779
Initial FC at grade

Type II Medium Distribution

Input Power Designator	3000K		4000K		5700K	
	Initial Delivered Lumens*	BUG Ratings** Per TM-15-11	Initial Delivered Lumens*	BUG Ratings** Per TM-15-11	Initial Delivered Lumens*	BUG Ratings** Per TM-15-11
B	10,738	B2 U0 G2	11,424	B2 U0 G2	11,648	B2 U0 G2
K	16,022	B3 U0 G3	16,959	B3 U0 G3	17,291	B3 U0 G3
Z	6,481	B2 U0 G1	6,896	B2 U0 G1	7,031	B2 U0 G1


* Initial delivered lumens at 25°C (77°F). Actual production yield may vary between -10 and +10% of initial delivered lumens
 ** For more information on the IES BUG (Backlight-Uplight-Glare) Rating visit: <https://www.ies.org/wp-content/uploads/2017/03/TM-15-11BUGRatingsAddendum.pdf>. Valid with no tilt

Type II Medium w/BLS Distribution


Input Power Designator	3000K		4000K		5700K	
	Initial Delivered Lumens*	BUG Ratings** Per TM 15 11	Initial Delivered Lumens*	BUG Ratings** Per TM 15 11	Initial Delivered Lumens*	BUG Ratings** Per TM 15 11
B	8,251	B2 U0 G2	8,779	B2 U0 G2	8,950	B2 U0 G2
K	12,312	B2 U0 G2	13,032	B2 U0 G2	13,286	B2 U0 G2
Z	4,980	B1 U0 G1	5,299	B1 U0 G1	5,402	B1 U0 G1

* Initial delivered lumens at 25°C (77°F). Actual production yield may vary between -10 and +10% of initial delivered lumens
 ** For more information on the IES BUG (Backlight-Uplight-Glare) Rating visit: <https://www.ies.org/wp-content/uploads/2017/03/TM-15-11BUGRatingsAddendum.pdf>. Valid with no tilt


3ME




RESTL Test Report #: PL08876-001A
OSQ-A-3ME-B-30K-UL**
Initial Delivered Lumens: 10,421



OSQ-A-3ME-B-40K-UL**
Mounting Height: 25' (7.6m) A.F.G.
Initial Delivered Lumens: 11,424
Initial FC at grade



CESTL Test Report #: PL07699-001A
OSQ-A-3ME-U-57K-UL w/OSQ-BLSLF**
Initial Delivered Lumens: 23,601



OSQ-A-3ME-B-40K-UL w/OSQ-BLSMF**
Mounting Height: 25' (7.6m) A.F.G.
Initial Delivered Lumens: 9,019
Initial FC at grade

Type III Medium Distribution

Input Power Designator	3000K		4000K		5700K	
	Initial Delivered Lumens*	BUG Ratings** Per TM 15 11	Initial Delivered Lumens*	BUG Ratings** Per TM 15 11	Initial Delivered Lumens*	BUG Ratings** Per TM 15 11
B	10,738	B3 U0 G3	11,424	B3 U0 G3	11,648	B3 U0 G3
K	16,022	B3 U0 G3	16,959	B3 U0 G3	17,291	B3 U0 G3
Z	6,481	B2 U0 G2	6,896	B2 U0 G2	7,031	B2 U0 G2

* Initial delivered lumens at 25°C (77°F). Actual production yield may vary between -10 and +10% of initial delivered lumens
 ** For more information on the IES BUG (Backlight-Uplight-Glare) Rating visit: <https://www.ies.org/wp-content/uploads/2017/03/TM-15-11BUGRatingsAddendum.pdf>. Valid with no tilt

Type III Medium w/BLS Distribution

Input Power Designator	3000K		4000K		5700K	
	Initial Delivered Lumens*	BUG Ratings** Per TM-15-11	Initial Delivered Lumens*	BUG Ratings** Per TM-15-11	Initial Delivered Lumens*	BUG Ratings** Per TM-15-11
B	8,477	B1 U0 G2	9,019	B1 U0 G2	9,196	B1 U0 G2
K	12,649	B2 U0 G2	13,389	B2 U0 G2	13,650	B2 U0 G2
Z	5,117	B1 U0 G1	5,444	B1 U0 G1	5,551	B1 U0 G1


* Initial delivered lumens at 25°C (77°F). Actual production yield may vary between -10 and +10% of initial delivered lumens
 ** For more information on the IES BUG (Backlight-Uplight-Glare) Rating visit: <https://www.ies.org/wp-content/uploads/2017/03/TM-15-11BUGRatingsAddendum.pdf>. Valid with no tilt




Photometry

All published luminaire photometric testing performed to IESNA LM-79-08 standards by a NVLAP accredited laboratory. To obtain an IES file specific to your project consult: <http://lighting.cree.com/products/outdoor/area/osq-series>


4ME




RESTL Test Report #: PL08878-001A
OSQ-A-4ME-B-30K-UL
Initial Delivered Lumens: 10,230



OSQ-A-4ME-B-40K-UL
Mounting Height: 25' (7.6m) A.F.G.
Initial Delivered Lumens: 11,424
Initial FC at grade



CESTL Test Report #: PL07692-001A
OSQ-A-4ME-U-57K-UL w/OSQ-BLSLF
Initial Delivered Lumens: 22,793



OSQ-A-4ME-B-40K-UL w/OSQ-BLSMF
Mounting Height: 25' (7.6m) A.F.G.
Initial Delivered Lumens: 8,779
Initial FC at grade


Type IV Medium Distribution						
Input Power Designator	3000K		4000K		5700K	
	Initial Delivered Lumens*	BUG Ratings** Per TM-15-11	Initial Delivered Lumens*	BUG Ratings** Per TM-15-11	Initial Delivered Lumens*	BUG Ratings** Per TM-15-11
B	10,738	B2 U0 G2	11,424	B2 U0 G2	11,648	B2 U0 G2
K	16,022	B3 U0 G3	16,959	B3 U0 G3	17,291	B3 U0 G3
Z	6,481	B2 U0 G2	6,896	B2 U0 G2	7,031	B2 U0 G2

* Initial delivered lumens at 25°C (77°F). Actual production yield may vary between -10 and +10% of initial delivered lumens
** For more information on the IES BUG (Backlight-Uplight-Glare) Rating visit: <https://www.ies.org/wp-content/uploads/2017/03/TM-15-11BUGRatingsAddendum.pdf>. Valid with no tilt


Type IV Medium w/BLS Distribution						
Input Power Designator	3000K		4000K		5700K	
	Initial Delivered Lumens*	BUG Ratings** Per TM 15 11	Initial Delivered Lumens*	BUG Ratings** Per TM 15 11	Initial Delivered Lumens*	BUG Ratings** Per TM 15 11
B	8,251	B1 U0 G2	8,779	B1 U0 G2	8,950	B1 U0 G2
K	12,312	B2 U0 G2	13,032	B2 U0 G2	13,286	B2 U0 G2
Z	4,980	B1 U0 G1	5,299	B1 U0 G1	5,402	B1 U0 G1

* Initial delivered lumens at 25°C (77°F). Actual production yield may vary between -10 and +10% of initial delivered lumens
** For more information on the IES BUG (Backlight-Uplight-Glare) Rating visit: <https://www.ies.org/wp-content/uploads/2017/03/TM-15-11BUGRatingsAddendum.pdf>. Valid with no tilt

5ME



RESTL Test Report #: PL08534-001B
OSQ-A-5ME-B-40K-UL
Initial Delivered Lumens: 10,519




OSQ-A-5ME-B-40K-UL
Mounting Height: 25' (7.6m) A.F.G.
Initial Delivered Lumens: 10,867
Initial FC at grade


Type V Medium Distribution						
Input Power Designator	3000K		4000K		5700K	
	Initial Delivered Lumens*	BUG Ratings** Per TM-15-11	Initial Delivered Lumens*	BUG Ratings** Per TM-15-11	Initial Delivered Lumens*	BUG Ratings** Per TM-15-11
B	10,232	B4 U0 G3	10,867	B4 U0 G3	11,056	B4 U0 G3
K	15,063	B4 U0 G4	15,999	B4 U0 G4	16,277	B4 U0 G4
Z	5,257	B3 U0 G3	6,086	B3 U0 G3	6,192	B3 U0 G3

* Initial delivered lumens at 25°C (77°F). Actual production yield may vary between -10 and +10% of initial delivered lumens
** For more information on the IES BUG (Backlight-Uplight-Glare) Rating visit: <https://www.ies.org/wp-content/uploads/2017/03/TM-15-11BUGRatingsAddendum.pdf>. Valid with no tilt

5SH



CESTL Test Report #: PL10754-001A
OSQ-A-5SH-U-40K-UL
Initial Delivered Lumens: 25,679



OSQ-A-5SH-B-40K-UL
Mounting Height: 25' (7.6m) A.F.G.
Initial Delivered Lumens: 11,478
Initial FC at grade

Type V Short Distribution						
Input Power Designator	3000K		4000K		5700K	
	Initial Delivered Lumens*	BUG Ratings** Per TM 15 11	Initial Delivered Lumens*	BUG Ratings** Per TM 15 11	Initial Delivered Lumens*	BUG Ratings** Per TM 15 11
B	10,806	B4 U0 G2	11,478	B4 U0 G2	11,678	B4 U0 G2
K	15,909	B4 U0 G3	16,897	B4 U0 G3	17,191	B4 U0 G3
Z	5,552	B3 U0 G1	6,428	B3 U0 G2	6,539	B3 U0 G2


* Initial delivered lumens at 25°C (77°F). Actual production yield may vary between -10 and +10% of initial delivered lumens
** For more information on the IES BUG (Backlight-Uplight-Glare) Rating visit: <https://www.ies.org/wp-content/uploads/2017/03/TM-15-11BUGRatingsAddendum.pdf>. Valid with no tilt




Photometry

All published luminaire photometric testing performed to IESNA LM-79-08 standards by a NVLAP accredited laboratory. To obtain an IES file specific to your project consult: <http://lighting.cree.com/products/outdoor/area/osq-series>

15D



CESTL Test Report #: PL07689-001A
OSQ-A-**-15D-U-30K-UL
Initial Delivered Lumens: 23,254




OSQ-A-**-15D-B-40K-UL
Mounting Height: 25' (7.6m) A.F.G., 60° Tilt
Initial Delivered Lumens: 11,478
Initial FC at grade

15° Flood Distribution


Input Power Designator	3000K	4000K	5700K
	Initial Delivered Lumens*	Initial Delivered Lumens*	Initial Delivered Lumens*
B	10,806	11,478	11,678
K	15,909	16,897	17,191
Z	5,552	6,428	6,539

* Initial delivered lumens at 25°C (77°F). Actual production yield may vary between -10 and +10% of initial delivered lumens

25D



CESTL Test Report #: PL07687-001A
OSQ-A-**-25D-U-30K-UL
Initial Delivered Lumens: 23,265




OSQ-A-**-25D-B-40K-UL
Mounting Height: 25' (7.6m) A.F.G., 60° Tilt
Initial Delivered Lumens: 11,478
Initial FC at grade

25° Flood Distribution


Input Power Designator	3000K	4000K	5700K
	Initial Delivered Lumens*	Initial Delivered Lumens*	Initial Delivered Lumens*
B	10,806	11,478	11,678
K	15,909	16,897	17,191
Z	5,552	6,428	6,539

* Initial delivered lumens at 25°C (77°F). Actual production yield may vary between -10 and +10% of initial delivered lumens

40D



CESTL Test Report #: PL07697-001A
OSQ-A-**-40D-U-30K-UL
Initial Delivered Lumens: 22,943



OSQ-A-**-40D-B-40K-UL
Mounting Height: 25' (7.6m) A.F.G., 60° Tilt
Initial Delivered Lumens: 11,478
Initial FC at grade

40° Flood Distribution

Input Power Designator	3000K	4000K	5700K
	Initial Delivered Lumens*	Initial Delivered Lumens*	Initial Delivered Lumens*
B	10,806	11,478	11,678
K	15,909	16,897	17,191
Z	5,552	6,428	6,539


* Initial delivered lumens at 25°C (77°F). Actual production yield may vary between -10 and +10% of initial delivered lumens

OSQ™ LED Area/Flood Luminaire – Medium


Photometry

All published luminaire photometric testing performed to IESNA LM-79-08 standards by a NVLAP accredited laboratory. To obtain an IES file specific to your project consult: <http://lighting.cree.com/products/outdoor/area/osq-series>

60D



CESTL Test Report #: PL08100-001B
OSQ-A-**-60D-B-30K-UL
Initial Delivered Lumens: 10,079




OSQ-A-**-60D-B-40K-UL
Mounting Height: 25' (7.6m) A.F.G., 60° Tilt
Initial Delivered Lumens: 11,478
Initial FC at grade


60° Flood Distribution			
Input Power Designator	3000K	4000K	5700K
		Initial Delivered Lumens*	Initial Delivered Lumens*
B	10,806	11,478	11,678
K	15,909	16,897	17,191
Z	5,552	6,428	6,539

* Initial delivered lumens at 25°C (77°F). Actual production yield may vary between -10 and +10% of initial delivered lumens

WSN



CESTL Test Report #: PL07695-001A
OSQ-A-**-WSN-U-30K-UL
Initial Delivered Lumens: 23,116

















OSQ-A-**-WSN-B-40K-UL
Mounting Height: 25' (7.6m) A.F.G., 60° Tilt
Initial Delivered Lumens: 11,478
Initial FC at grade

Wide Sign Distribution			
Input Power Designator	3000K	4000K	5700K
		Initial Delivered Lumens*	Initial Delivered Lumens*
B	10,806	11,478	11,678
K	15,909	16,897	17,191
Z	5,552	6,428	6,539

* Initial delivered lumens at 25°C (77°F). Actual production yield may vary between -10 and +10% of initial delivered lumens

Luminaire EPA

Fixed Arm Mount – OSQ-DA Weight: 26.5 lbs. (12kg)					
Single	2 @ 180°	2 @ 90°	3 @ 90°	3 @ 120°	4 @ 90°
					
0.74	1.48	1.19	1.93	1.63	2.38

Adjustable Arm Mount – OSQ-AA Weight: 26.5 lbs. (12kg)							
Single	2 @ 180°	2 @ 90°	3 @ 90°	3 @ 120°	3 @ 180°	4 @ 180°	4 @ 90°
Tenon Configuration [0° -80° Tilt]; If used with Cree tenons, please add tenon EPA with Luminaire EPA							
							
PB-1A*; PT-1; PW-1A3**	PB-2A*; PB-2R2.375; PD-2A4(180); PT-2(180); PW-2A3**	PB-2A*; PD-2A4(90); PT-2(90)	PB-3A*; PD-3A4(90); PT-3(90)	PB-3A*; PT-3(120)	PB-3A*; PB-3R2.375	PB-4A*(180)	PB-4A*(90); PB-4R2.375; PD-4A4(90); PT-4(90)
0° Tilt							
0.74	1.48	1.19	1.93	1.63	3.33	4.66	2.38
10° Tilt							
0.75	1.48	1.49	2.23	2.15	4.22	5.84	2.98
20° Tilt							
1.12	1.48	1.86	2.60	2.85	5.31	7.32	3.72
30° Tilt							
1.46	1.48	2.20	2.94	3.56	6.34	8.68	4.40
45° Tilt							
1.96	1.96	2.69	3.43	4.54	7.83	10.68	5.38
60° Tilt							
2.33	2.33	3.07	3.81	5.11	8.94	12.16	6.14
70° Tilt							
2.49	2.49	3.23	3.97	5.11	9.43	12.80	6.46
80° Tilt							
2.58	2.58	3.32	4.06	5.11	9.71	13.16	6.64
Tenon Configuration [90° Tilt]; If used with Cree tenons, please add tenon EPA with Luminaire EPA							
PB-1A*; PT-1; PW-1A3**	PB-2A*; PB-2R2.375; PD-2A4(180); PT-2(180); PW-2A3**	PB-2A*	PB-3A*	PB-3A*; PT-3(120)	PB-3A*; PB-3R2.375	PB-4A*(180)	PB-4A*(90); PB-4R2.375
90° Tilt							
2.61	2.61	4.44	6.05	5.11	9.79	13.28	10.39

* Specify pole size: 3 [3"], 4 [4"], 5 [5"], or 6 [6"] for single, double or triple luminaire orientation or 4 [4"], 5 [5"], or 6 [6"] for quad luminaire orientation
 ** These EPA values must be multiplied by the following ratio: Fixture Mounting Height/Total Pole Height. Specify pole size: 3 [3"], 4 [4"], 5 [5"], or 6 [6"]



Tenon EPA

Part Number	EPA
PB-1A*	None
PB-2A*	0.82
PB-3A*	1.52
PB-4A*(180)	2.22
PB-4A*(90)	1.11
PB-2R2.375	0.92
PB-3R2.375	1.62
PB-4R2.375	2.32
PD Series Tenons	0.09
PT Series Tenons	0.10
PW-1A3**	0.47
PW-2A3**	0.94
WM-2	0.08
WM-4	0.25
WM-DM	None

* Specify pole size: 3 [3"], 4 [4"], 5 [5"], or 6 [6"] for single, double or triple luminaire orientation or 4 [4"], 5 [5"], or 6 [6"] for quad luminaire orientation
 ** These EPA values must be multiplied by the following ratio: Fixture Mounting Height/Total Pole Height. Specify pole size: 3 [3"], 4 [4"], 5 [5"], or 6 [6"]

Tenons and Brackets* (must specify color)	
Square Internal Mount Vertical Tenons (Steel) - Mounts to 3-6" [76-152mm] square aluminum or steel poles PB-1A* – Single PB-4A*(90) – 90° Quad PB-2A* – 180° Twin PB-4A*(180) – 180° Quad PB-3A* – 180° Triple	Round External Mount Vertical Tenons (Steel) - Mounts to 2.375" [60mm] O.D. round aluminum or steel poles or tenons PB-2R2.375 – Twin PB-4R2.375 – Quad PB-3R2.375 – Triple
Square Internal Mount Horizontal Tenons (Aluminum) - Mounts to 4" [102mm] square aluminum or steel poles PD-2A4(90) – 90° Twin PD-3A4(90) – 90° Triple PD-2A4(180) – 180° Twin PD-4A4(90) – 90° Quad	Round External Mount Horizontal Tenons (Aluminum) - Mounts to 2.375" [60mm] O.D. round aluminum or steel poles or tenons - Mounts to square pole with PB-1A* tenon PT-1 – Single [Vertical] PT-3(90) – 90° Triple PT-2(90) – 90° Twin PT-3(120) – 120° Triple PT-2(180) – 180° Twin PT-4(90) – 90° Quad
Wall Mount Brackets - Mounts to wall or roof WM-2 – Horizontal for OSQ-AA mount WM-4 – L-Shape for OSQ-AA mount WM-DM – Plate for OSQ-DA mount	Mid-Pole Bracket - Mounts to square pole PW-1A3** – Single PW-2A3** – Double
	Ground Mount Post - For ground mounted flood luminaires PGM-1 - for OSQ-AA mount

* Refer to the [Bracket and Tenons spec sheet](#) for more details

Direct Mount Configurations

Compatibility with OSQ-DA Direct Mount Bracket					
Input Power Designator	2 @ 90°	2 @ 180°	3 @ 90°	3 @ 120°	4 @ 90°
3" Square					
B, K & Z	N/A	✓	N/A	N/A	N/A
3" Round					
B, K & Z	N/A	✓	N/A	N/A	N/A
4" Square					
B, K & Z	✓	✓	✓	N/A	✓
4" Round					
B, K & Z	✓	✓	✓	✓	✓
5" Square					
B, K & Z	✓	✓	✓	N/A	✓
5" Round					
B, K & Z	✓	✓	✓	✓	✓
6" Square					
B, K & Z	✓	✓	✓	N/A	✓
6" Round					
B, K & Z	✓	✓	✓	✓	✓

Field Adjustable Output (Q9/Q6/Q5/Q4/Q3/Q2/Q1) Option Description:

The Field Adjustable Output option enables the OSQ area luminaires to be tuned to the exact needs of a particular application through multiple levels of adjustment. When ordered with the Q option, the luminaire will be shipped from the factory at the selected Q setting and will be fully adjustable between the nine settings.

Q Option Power & Lumen Data – Designator B

Q Option Setting	CCT	System Watts	Lumen Values						Optics Qualified on DLC QPL	
			120-480V	Asymmetric	5ME	5SH & Floods	2ME w/ BLS	3ME w/ BLS	4ME w/BLS	Standard
Q9 (Full Power)	30K	86	10,738	10,232	10,806	8,251	8,477	8,251	5ME	2ME, 3ME, 4ME, 5SH, 15D, 25D, 40D, 60D, WSN
	40K		11,424	10,867	11,478	8,779	9,019	8,779	N/A	2ME, 3ME, 4ME, 5ME, 5SH, 15D, 25D, 40D, 60D, WSN
	57K		11,648	11,056	11,678	8,950	9,196	8,950		
Q6	30K	77	9,449	9,004	9,509	7,261	7,460	7,261	5ME	2ME, 3ME, 4ME, 5SH, 15D, 25D, 40D, 60D, WSN
	40K		10,053	9,563	10,101	7,726	7,937	7,726	N/A	2ME, 3ME, 4ME, 5ME, 5SH, 15D, 25D, 40D, 60D, WSN
	57K		10,250	9,729	10,277	7,876	8,092	7,876		
Q5	30K	72	8,913	8,492	8,969	6,848	7,036	6,848	5ME	2ME, 3ME, 4ME, 5SH, 15D, 25D, 40D, 60D, WSN
	40K		9,482	9,020	9,527	7,287	7,486	7,287	N/A	2ME, 3ME, 4ME, 5ME, 5SH, 15D, 25D, 40D, 60D, WSN
	57K		9,668	9,176	9,693	7,429	7,633	7,429		
Q4	30K	62	7,731	7,367	7,780	5,941	6,103	5,941	5ME	2ME, 3ME, 4ME, 5SH, 15D, 25D, 40D, 60D, WSN
	40K		8,225	7,824	8,264	6,321	6,494	6,321	N/A	2ME, 3ME, 4ME, 5ME, 5SH, 15D, 25D, 40D, 60D, WSN
	57K		8,387	7,960	8,408	6,444	6,621	6,444		
Q3	30K	53	6,550	6,241	6,592	5,033	5,171	5,033	5ME	2ME, 3ME, 4ME, 5SH, 15D, 25D, 40D, 60D, WSN
	40K		6,969	6,629	7,002	5,355	5,502	5,355	N/A	2ME, 3ME, 4ME, 5ME, 5SH, 15D, 25D, 40D, 60D, WSN
	57K		7,105	6,744	7,124	5,460	5,610	5,460		
Q2	30K	45	5,476	5,218	5,511	4,208	4,323	4,208	5ME	2ME, 3ME, 4ME, 5SH, 15D, 25D, 40D, 60D, WSN
	40K		5,826	5,542	5,854	4,477	4,600	4,477	N/A	2ME, 3ME, 4ME, 5ME, 5SH, 15D, 25D, 40D, 60D, WSN
	57K		5,940	5,639	5,956	4,565	4,690	4,565		
Q1	30K	34	4,188	3,990	4,214	3,218	3,306	3,218	5ME	2ME, 3ME, 4ME, 5SH, 15D, 25D, 40D, 60D, WSN
	40K		4,455	4,238	4,476	3,424	3,517	3,424	N/A	2ME, 3ME, 4ME, 5ME, 5SH, 15D, 25D, 40D, 60D, WSN
	57K		4,543	4,312	4,554	3,491	3,586	3,491		



Field Adjustable Output (Q9/Q6/Q5/Q4/Q3/Q2/Q1) Option Description:

The Field Adjustable Output option enables the OSQ area luminaires to be tuned to the exact needs of a particular application through multiple levels of adjustment. When ordered with the Q option, the luminaire will be shipped from the factory at the selected Q setting and will be fully adjustable between the nine settings.

Q Option Power & Lumen Data – Designator K

Q Option Setting	CCT	System Watts	Lumen Values						Optics Qualified on DLC QPL	
			120-480V	Asymmetric	5ME	5SH & Floods	2ME w/BLS	3ME w/BLS	4ME w/BLS	Standard
Q9 (FullPower)	30K	130	16,022	15,063	15,909	12,312	12,649	12,312	5ME	2ME, 3ME, 4ME, 5SH, 15D, 25D, 40D, 60D, WSN
	40K		16,959	15,999	16,897	13,032	13,389	13,032	N/A	2ME, 3ME, 4ME, 5ME, 5SH, 15D, 25D, 40D, 60D, WSN
	57K		17,291	16,277	17,191	13,286	13,650	13,286		
Q6	30K	117	14,099	13,255	14,000	10,835	11,131	10,835	5ME	2ME, 3ME, 4ME, 5SH, 15D, 25D, 40D, 60D, WSN
	40K		14,924	14,079	14,869	11,468	11,782	11,468	N/A	2ME, 3ME, 4ME, 5ME, 5SH, 15D, 25D, 40D, 60D, WSN
	57K		15,216	14,324	15,128	11,692	12,012	11,692		
Q5	30K	110	13,298	12,502	13,204	10,219	10,499	10,219	5ME	2ME, 3ME, 4ME, 5SH, 15D, 25D, 40D, 60D, WSN
	40K		14,076	13,279	14,025	10,817	11,113	10,817	N/A	2ME, 3ME, 4ME, 5ME, 5SH, 15D, 25D, 40D, 60D, WSN
	57K		14,352	13,510	14,269	11,027	11,330	11,027		
Q4	30K	93	11,536	10,845	11,454	8,865	9,107	8,865	5ME	2ME, 3ME, 4ME, 5SH, 15D, 25D, 40D, 60D, WSN
	40K		12,210	11,519	12,166	9,383	9,640	9,383	N/A	2ME, 3ME, 4ME, 5ME, 5SH, 15D, 25D, 40D, 60D, WSN
	57K		12,450	11,719	12,378	9,566	9,828	9,566		
Q3	30K	80	9,773	9,188	9,704	7,510	7,716	7,510	5ME	2ME, 3ME, 4ME, 5SH, 15D, 25D, 40D, 60D, WSN
	40K		10,345	9,759	10,307	7,950	8,167	7,950	N/A	2ME, 3ME, 4ME, 5ME, 5SH, 15D, 25D, 40D, 60D, WSN
	57K		10,548	9,929	10,487	8,104	8,327	8,104		
Q2	30K	67	8,171	7,682	8,114	6,279	6,451	6,279	5ME	2ME, 3ME, 4ME, 5SH, 15D, 25D, 40D, 60D, WSN
	40K		8,649	8,159	8,617	6,646	6,828	6,646	N/A	2ME, 3ME, 4ME, 5ME, 5SH, 15D, 25D, 40D, 60D, WSN
	57K		8,818	8,301	8,767	6,776	6,962	6,776		
Q1	30K	51	6,249	5,875	6,205	4,802	4,933	4,802	5ME	2ME, 3ME, 4ME, 5SH, 15D, 25D, 40D, 60D, WSN
	40K		6,614	6,240	6,590	5,082	5,222	5,082	N/A	2ME, 3ME, 4ME, 5ME, 5SH, 15D, 25D, 40D, 60D, WSN
	57K		6,743	6,348	6,704	5,182	5,324	5,182		

PS Series

PR5R Round Steel Poles

Product Description

Non-tapered round steel poles are supplied with welded base with cover, four galvanized anchor bolts, masonite mounting template. Each anchor bolt is provided with two washers and two nuts. Steel pole base has slotted holes. Per National Electrical Code requirements, pole is standard with a 2" x 6" (51 x 152mm) hand hole, located 12" (305mm) above the bottom of the pole base. A #10-32 stainless-steel weld stud is located inside pole, opposite hand hole; a hand hole cover is supplied but shipped separately.

CONSTRUCTION & MATERIALS

- Round, non tapered pole of structural steel tubing (ASTM A 500) with a minimum yield of 42,000 p.s.i
- Welded to a formed carbon steel base plate with a minimum yield strength of 36,000 p.s.i
- 3/4" - 10x18" + 3" anchor bolts
- Exclusive Colorfast DeltaGuard® finish features an E-Coat epoxy primer with an ultra-durable powder topcoat, providing excellent resistance to corrosion, ultraviolet degradation and abrasion


REGULATORY & VOLUNTARY QUALIFICATIONS

- National Electrical Code Requirements
- UL Listed in US for electrical ground bonding

LIMITED WARRANTY¹

- 7 years on pole/7 years on Colorfast DeltaGuard® finish

¹See <http://lighting.cree.com/warranty> for warranty terms

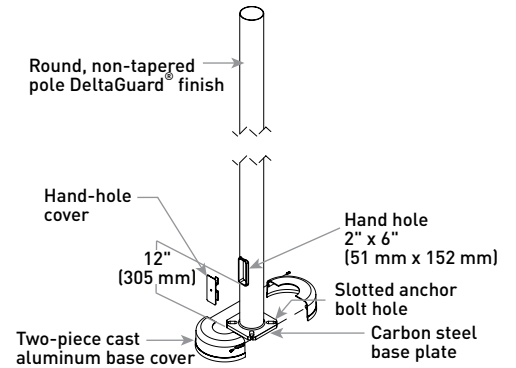

Accessories

Field-Installed	
REC-GFI5&6ABZ REC-GFI5&6ABK REC-GFI5&6AWH	REC-GFI5&6ASV - GFI Outlet Accessory - 120V

Ordering Information

Example: PS5R12C1BK

Product	Mounting Configuration	Color Options	
PS5R12C 12' x 5" x 0.120" PS5R15C 15' x 5" x 0.120" PS5R17C 17' x 5" x 0.120" PS5R20C 20' x 5" x 0.120"	PS5R22C 22' x 5" x 0.120" PS5R25C 25' x 5" x 0.120" PS5R27C 27' x 5" x 0.120" PS5R30C 30' x 5" x 0.120"	1 Single ¹ 2 Twin @ 180° ¹ 3 Twin @ 90° ¹ 5 Triple @ 90° ¹ 6 Quad @ 90° ¹ 7 Triple @ 120° ¹ 0 Post Top Fixture (no holes drilled in pole) ²	BK Black BZ Bronze SV Silver WH White

¹ Direct mount pole configuration. N/A for Cree Edge™ High Output luminaires

² Order tenon separately. Refer to Bracket and Tenons spec sheet for additional information

CA RESIDENTS WARNING: Cancer and Reproductive Harm – www.p65warnings.ca.gov



US: lighting.cree.com

T (800) 236-6800 F (262) 504-5415

Rev. Date: V2 10/10/2018

Canada: www.cree.com/canada



T (800) 473-1234 F (800) 890-7507

EPA & Weight

Product	Height x Width x Wall	Base Plate	Bolt Circle/ Range (in)	80 MPH Max		90 MPH Max		100 MPH Max		110 MPH Max		120 MPH Max		130 MPH Max		140 MPH Max		Approx. Shipping Weight
				EPA	Fixture Weight	EPA	Fixture Weight	EPA	Fixture Weight	EPA	Fixture Weight	EPA	Fixture Weight	EPA	Fixture Weight	EPA	Fixture Weight	
PS5R12C	12' x 5" x 0.120"	8" Sq. x 0.75" Thick	8/7.0-9.0	29.5	200 lbs. (91kg)	23.1	200 lbs. (91kg)	18.1	200 lbs. (91kg)	14.1	200 lbs. (91kg)	11.5	160 lbs. (73kg)	9.7	160 lbs. (73kg)	8.1	160 lbs. (73kg)	85 lbs. (39kg)
PS5R15C	15' x 5" x 0.120"	8" Sq. x 0.75" Thick	8/7.0-9.0	25.5	200 lbs. (91kg)	19.9	200 lbs. (91kg)	15.5	200 lbs. (91kg)	12.1	200 lbs. (91kg)	9.8	160 lbs. (73kg)	8.3	160 lbs. (73kg)	6.8	160 lbs. (73kg)	109 lbs. (49kg)
PS5R17C	17' x 5" x 0.120"	8" Sq. x 0.75" Thick	8/7.0-9.0	22.8	200 lbs. (91kg)	17.7	200 lbs. (91kg)	13.8	200 lbs. (91kg)	10.7	200 lbs. (91kg)	8.6	160 lbs. (73kg)	7.3	160 lbs. (73kg)	6.0	120 lbs. (54kg)	122 lbs. (55kg)
PS5R20C	20' x 5" x 0.120"	8" Sq. x 0.75" Thick	8/7.0-9.0	18.8	200 lbs. (91kg)	14.5	200 lbs. (91kg)	11.2	200 lbs. (91kg)	8.6	200 lbs. (91kg)	6.9	160 lbs. (73kg)	5.8	160 lbs. (73kg)	4.8	120 lbs. (54kg)	140 lbs. (64kg)
PS5R22C	22' x 5" x 0.120"	8" Sq. x 0.75" Thick	8/7.0-9.0	16.2	200 lbs. (91kg)	12.4	200 lbs. (91kg)	9.5	160 lbs. (73kg)	7.3	160 lbs. (73kg)	5.8	160 lbs. (73kg)	4.8	160 lbs. (73kg)	3.9	120 lbs. (54kg)	153 lbs. (69kg)
PS5R25C	25' x 5" x 0.120"	8" Sq. x 0.75" Thick	8/7.0-9.0	12.2	200 lbs. (91kg)	9.2	200 lbs. (91kg)	6.9	160 lbs. (73kg)	5.2	160 lbs. (73kg)	4.1	120 lbs. (54kg)	3.3	120 lbs. (54kg)	2.7	80 lbs. (36kg)	172 lbs. (78kg)
PS5R27C	27' x 5" x 0.120"	8" Sq. x 0.75" Thick	8/7.0-9.0	10.5	200 lbs. (91kg)	7.8	200 lbs. (91kg)	5.8	160 lbs. (73kg)	4.3	160 lbs. (73kg)	3.3	120 lbs. (54kg)	2.7	120 lbs. (54kg)	2.1	80 lbs. (36kg)	184 lbs. (83kg)
PS5R30C	30' x 5" x 0.120"	8" Sq. x 0.75" Thick	8/7.0-9.0	7.8	200 lbs. (91kg)	5.6	200 lbs. (91kg)	4.0	160 lbs. (73kg)	2.9	160 lbs. (73kg)	2.2	120 lbs. (54kg)	1.7	120 lbs. (54kg)	1.3	80 lbs. (36kg)	201 lbs. (91kg)

NOTE: Hanging signs, banners and flags on poles changes the EPA rating and increases vibration. The EPA ratings data provided does not allow for this added stress which could result in pole or luminaire failure

This map indicates approximate maximum wind zones throughout the U.S. Base wind velocities are established using a 50-year recurring mean. The EPA rating of the pole must be equal to or greater than that of the luminaire(s), taking into consideration the wind conditions at the job site.

