O.M.B. NO. 3067-0077 Expires May 31, 1996

ELEVATION CERTIFICAT

FEDERAL EMERGENCY MANAGEMENT AGENCY NATIONAL FLOOD INSURANCE PROGRAM

ATTENTION: Use of this certificate does not provide a waiver of the flood insurance purchase requirement. This form is used only to provide elevation information necessary to ensure compliance with applicable community floodplain management ordinances, to determine the proper insurance premium rate, and/or to support a request for a Letter of Map Amendment or Revision (LOMA or LOMR). Instructions for completing this form can be found on the following pages.

	·····	<u> </u>		31-3		
SECTION A PROPERTY INFORMATION					FOR INSURANCE COMPANY USE	
<u></u>	3111 Larson		APN 140-081		POLICY NUMBER	
STREET ADDRESS (Including Ap	O Mc Keon		ROUTE AND BOX NUMBER		COMPANY NAIC NUMBER	
Lot 7, Celes	Block Numbers, etc.) The Estates	13, M	2p5, ZZ Mari	n County	Records	
Movato	,			STATE	ZIP CODE 94947	
	SECTION B FL	OOD INSUR	NCE RATE MAP (FIRM)	INFORMATION		
Provide the following from th	ne proper FIRM (See	Instructions):	~			
1 COMMUNITY NUMBER	2 PANEL NUMBER	3. SUFFIX	4. DATE OF FIRM INDEX	5. FIRM ZONE	6. BASE FLOOD ELEVATION (in AO Zones, use depth)	
060178	0002	C	sept. 29,1989	ADE	41. B	
7. Indicate the elevation datum system used on the FIRM for Base Flood Elevations (BFE): NGVD '29 Other (describe on back) 3. For Zones A or V, where no BFE is provided on the FIRM, and the community has established a BFE for this building site, indicate the community's BFE: Liliable Lifeet NGVD (or other FIRM datum—see Section B, Item 7).						
	SECTIO	NC BUILDI	NG ELEVATION INFORM	ATION		
of 7.3 1 fee (b). FIRM Zones V1-V30, V the selected diagram, i (c). FIRM Zone A (without below (check one) (d). FIRM Zone AO. The fi one) the highest grade level) elevated in accord. Indicate the elevation dat under Comments on Pagethe FIRM [see Section Elevation under Comments on Pagethe FIRM [see Section Elevation under Comments on Pagethe FIRM [see Section Elevation reference mark].	AE, AH, and A (with E t NGVD (or other FIR VE, and V (with BFE). Is at an elevation of BFE). The floor used the highest grade addoor used as the refer adjacent to the building ance with the commum system used in dee 2). (NOTE: If the early, then converts on Page 2) used appears on FIF	M datum—see The bottom of the bottom of the bottom of the beaution datum of the beaution datum of the elevation da	Section B, Item 7). of the lowest horizontal struction in the selected diagram is a depth number is available ain management ordinance above reference level elevates to the datum system us. No (See Instructions or	uctural member of M datum-see Sed diagram is feet able, is the building's e? Yes NGVI levations: X NGVI levations is different and the FIRM and Page 4)	otion B, Item 7). L feet above or ove or below (check s lowest floor (reference No Unknown 0 '29 Other (describe	
5. The reference level elevation is based on: X actual construction construction drawings (NOTE: Use of construction drawings is only valid if the building does not yet have the reference level floor in place, in which case this certificate will only be valid for the building during the course of construction. A post-construction Elevation Certificate will be required once construction is complete.)						
S. The elevation of the lowest grade immediately adjacent to the building is: 1 42.0 feet NGVD (or other FIRM datum-see Section B, Item 7).						
SECTION D COMMUNITY INFORMATION						
. If the community official responsible for verifying building elevations specifies that the reference level indicated in Section C, Item 1 is not the "lowest floor" as defined in the community's floodplain management ordinance, the elevation of the building's "lowest floor" as defined by the ordinance is:						


SECTION E CERTIFICATION

This certification is to be signed by a land surveyor, engineer, or architect who is authorized by state or local law to certify elevation information when the elevation information for Zones A1–A30, AE, AH, A (with BFE),V1–V30,VE, and V (with BFE) is required. Community officials who are authorized by local law or ordinance to provide floodplain management information, may also sign the certification. In the case of Zones AO and A (without a FEMA or community issued BFE), a building official, a property owner, or an owner's representative may also sign the certification.

Reference level diagrams 6, 7 and 8 - Distinguishing Features-If the certifier is unable to certify to breakaway/non-breakaway wall, enclosure size, location of servicing equipment, area use, wall openings, or unfinished area Feature(s), then list the Feature(s) not included in the certification under Comments below. The diagram number, Section C, Item 1, must still be entered.

I certify that the information in Sections B and C on this certificate represents my best efforts to interpret the data available. I understand that any false statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 1001.

CERTIFIER'S NAME	LICENSE NUMBER (or Affix	Seal)	
Dale A. White	LS# 4397	•	
TITLE	COMPANY NAME		
Partner (DLANDS)	White & Prescott		
ADDRESS	CITY	STATE	ZIP
16 20 Great Ave 31	Novato	CA	9494
SIGNATURE DO CONTROL TO THE PORT OF THE PO	DATE	PHONE	
MIL WOMEN	12-19-94	<u>(415) 897-773</u>	0
Copies should be made of this Certificate for	/ 1) community official, 2) insurance agent//	company and 3) building)WD0r
		company, and 3, building t	owner.
COMMENTS: OF CALIFORNIA			
COMMENTS: OF CALIFO			
· · · · · · · · · · · · · · · · · · ·			

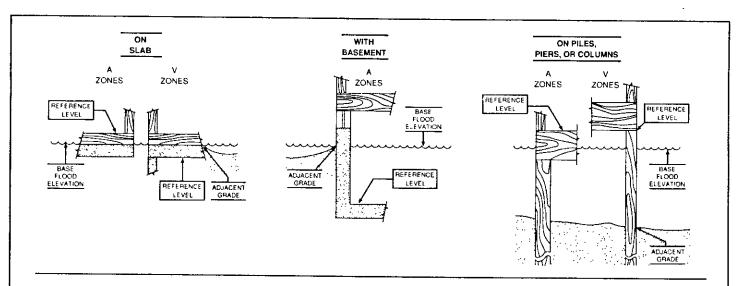

The diagrams above illustrate the points at which the elevations should be measured in A Zones and V Zones.

Elevations for all A Zones should be measured at the top of the reference level floor.

Elevations for all V Zones should be measured at the bottom of the lowest horizontal structural member.